


# DPS-240S / DPS-360S / DPS-480S / DPS-720S

## Class-D digital amplifiers - 2 x 240W / 2 x 360 W / 2 x 480W/ 2 x 720W

### - 100 V - 24 V DC

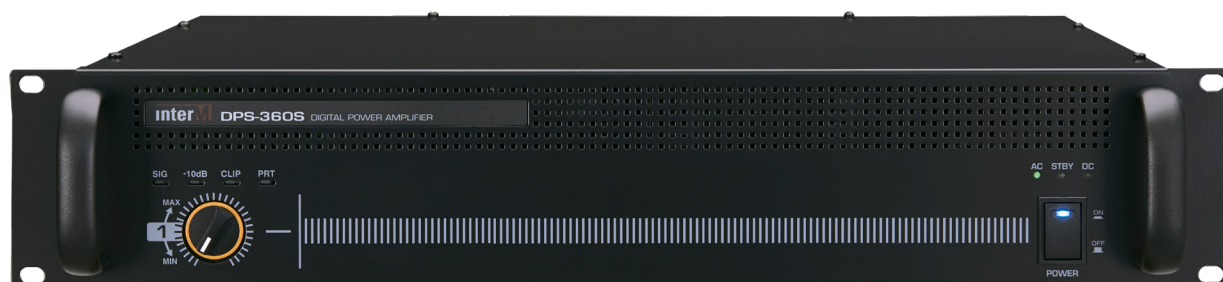

### Features

- The DPS series includes multiple Class-D, 2U digital amps with efficiency better than 90% for less heat dissipation, noise, and weight compared to traditional analog amps.
- The line features a number of models ranging from single to Double channel amps from 240 to 720W.
- Amps include 2 audio inputs, including one priority input to cut the current program so you can broadcast a priority message by dry contact, for example.
- Front-panel LEDs let you see amp status instantly.
- These amplifiers are fitted with a 24VDC supply terminal block for use on booster batteries.

### Technical Specifications

	DPS-240S	DPS-360S	DPS-480S	DPS-720S
Rated Power	240W	360W	480W	720W
Output Voltage/ Impedance	100V/41.7Ω	100V/27.8Ω	100V/20.8Ω	100V/13.9Ω
	70V/20.4Ω	70V/13.6Ω	70V/10.2Ω	70V/10.2Ω
Input Sensitivity	1V/10kΩ			
THD (AES17,1/8 Power)	Less than 0.5%			
Signal to Noise (20kHz LPF)	More than 100dB			
Frequency Response (1W, ±3dB)	60Hz~20kHz			
Operating Temperature	-10°C~40°C			
Operating Power	AC 220-240V,50/60Hz, DC 24V			
Power Consumption	130W			250W
Weight (Set)	6.9kg			7.96kg
Dimensions (Set)	482(W) × 88(H) × 371(D)mm			482(W) × 88(H) × 424(D)mm