

PM-236 / PM-248 / PM-260

360/480/600W Class D amplifiers with USB player



PM-248

- High-Z (100V/70V) and low-Z (8Ω/4Ω)
- Multiple inputs (3 MIC/LINE inputs, 2 LINE inputs, 2 stereo/LINE inputs, 1 TEL IN, 1 usb) and a feature for controlling the volume of each channel
- EXT in and MIX OUT
- Displaying input signal led by channel and output led level
- Tone (bass/treble) controlling
- 5 switches (zone selection switch)
- Broadcasting in priority
- TEL IN > INPUT 1 > INPUT 2 = INPUT 3 = INPUT 4 = INPUT 5 = INPUT 6
- External mute and external chime
- Chime and siren


Model		PM-236	PM-248	PM-260
Power RMS		360W	480W	600W
Output Impedance		38V/4Ω, 70V/13.6Ω, 100V/27.7Ω	44V/4Ω, 70V/10.2Ω, 100V/20.8Ω	70V/8.1Ω, 70V/8.1Ω, 100V/16.6Ω
Input sensitivity / Impedance	MIC	-60dBV / 2kΩ balanced		
	LINE	-20dBV / 2kΩ balanced		
	RCA	-20dBV / 20kΩ unbalanced		
	JACK 3.5	-20dBV / 2kΩ unbalanced		
	TEL IN	-20~0dBV / 40kΩ balanced		
	EXT IN	0dBV / 40kΩ balanced		
	MIX OUT	0dBV balanced		
Bandwidth (1W, ±3dB, Low-Z)		80 to 15,000Hz		
Signal / Noise	MIC	>50dB		
	RCA, JACK 3.5	>50dB		
	LINE, TEL IN	>70dB		
Tone Control	BASS (100Hz)	±10dB		
	TREBLE (10kHz)	±10dB		
THD+N Rated Power (1kHz)		< 1%		
Operating Temperature		-10°C ~ +40°C		
Consumption (1/8 W)		115W	125W	145W
Power source		220-240VAC 50/60Hz	120-240VAC, 50/60Hz	
Dimensions (WxHxD)		420 x 88 x 318.7mm		
Weight		5.1kg	5.27kg	



RM-05A: 5-zone selective call Mic station for PM-236/248/260

Station fitted with a high-quality electret microphone hose equipped with a level adjustment and a LEC volume unit meter.

- Comes with a 2m-cord (7 pairs + display) SubD15 connector.
- Hose length: 400mm
- Dimensions: 195 x 60 x 205mm
- Weight: 1.2kg

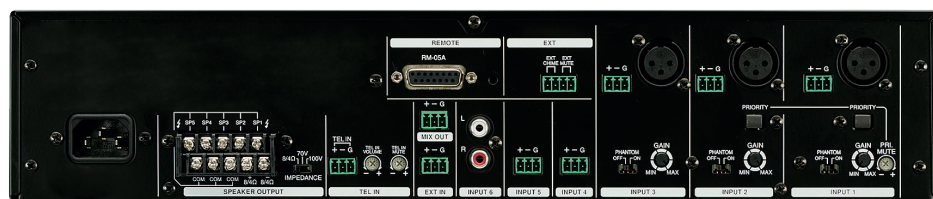

Rear panel

BKT-A120: Set of brackets for racking PM-236/248/260 amps (optional)

- BKT-A120 are brackets for fixing PM series amps-preamps in 19" racks.

