

## SMS-911

### 2G SMS Module, 8 dry contact inputs / 2 outputs



**The SMS-911 (2G) module is a very simple device** that can be used in addition to a sound system **in order to be alerted by SMS text in case of an anomaly, evacuation alert, chemical risk...**

This module interfaces perfectly with : ARM-911A - NPX-8000 - EXEO - VAS.

**A simple GPI (8 available) triggered will send you an SMS text to alert you. The SMS text content can be customized up to 3 phone numbers** using the PC programming software. For each dry contact (among the 8) corresponds the sending of a customizable SMS.

**You can also send an SMS text from your mobile phone to trigger an evacuation message** or any other message on an ARM-911A or NPX-8000... You simply need to insert a SIM card in the SMS-911 device (not included any operator).

- Has 2 relay outputs, 7A @ 125VAC, 5A @ 125VAC, 20A @ 14VDC.
- The output relay of the alarm link can be activated 0-120 min if the control unit is triggered; 8 Alarm, NC or NO inputs.
- Can be used from anywhere, no distance limitation.
- Quad band GSM GPRS 850/900/1800/1900MHz modules inside; UMTS / HSDPA / 4G / 3G modules are optional.
- 32-bit microcontroller, reliable performance with integrated watchdog.
- 1 siren output can connect to a siren directly.
- 3 SMS alert numbers and 5 alarm numbers.
- Can be configured and programed from PC Configurator via USB cable.
- Built-in rechargeable battery, energy loss / recovery alarm, 24/24 and 7/7 operation.
- Update firmware via USB.
- Wall mounting or 35 mm standard DIN rail, very simple installation.


| Model               | SMS-911                                                                                                                                                                                       |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power Supply        | AC adapter: DC 12V / 1A or a DC power supply between 9~36V DC                                                                                                                                 |
| Power Consumption   | Standby: 12VDC / 70 mA;<br>Max operation: 12VDC / 300 mA                                                                                                                                      |
| GSM/3G/4G Frequency | 2G: 850/900/1800/1900 Mhz<br>3G version Optional: (UMTS/HSDPA)<br>W:900/2100@UMTS 900/1800@GSM;<br>C:850/1900@UMTS 850/900/1800/1900@GSM;<br>T:850/2100@UMTS 850/900/1800/1900@GSM;<br>4G LTE |
| SIM card            | SIM card only                                                                                                                                                                                 |
| External Antenna    | SMA antenna, 50Ω                                                                                                                                                                              |
| Serial Interface    | 1 USB port                                                                                                                                                                                    |
| Input Contact       | 8x NC or NO dry contact                                                                                                                                                                       |
| Relay Output        | 2x Relay Outputs 7A @ 125VAC, 5A @ 125VAC, 20A @ 14VDC                                                                                                                                        |
| Siren Output        | 1                                                                                                                                                                                             |
| Backup Battery      | 3.7V 900mAh                                                                                                                                                                                   |
| Dimensions          | 70 x 88 x 30mm                                                                                                                                                                                |
| Installation        | 35 mm standard DIN rail (not supplied) - Wall bracket (default)                                                                                                                               |
| Weight              | 500g                                                                                                                                                                                          |

*Contents : mini USB / USB cable - Antenna - Battery (Integrated) AC adapter (12V1A) - User manual*

## SMS-911

2G SMS Module, 8 dry contact inputs / 2 outputs

PC Software : compatible with Windows XP/7/8/10

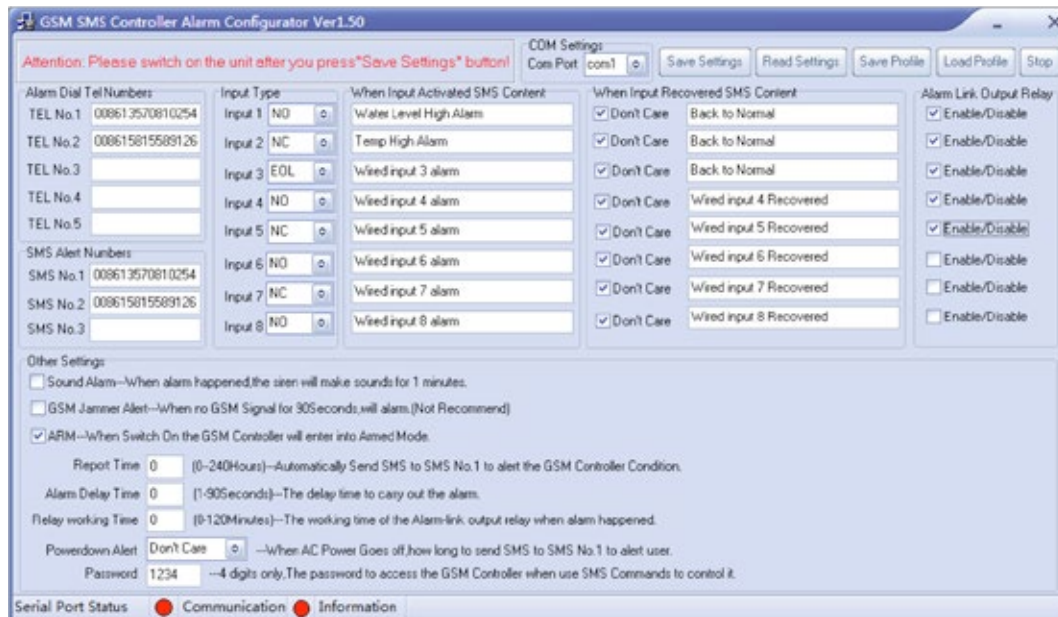

Application with ARM-911A



Ideal coupling with the ARM-911A / NPX-8000 / EXEO / VAS...  
To be warned and alert in real time of a possible triggering of PPMS alert; or evacuation message in a school; mall, industrial building or any other.



**MAJORCOM:**

56, chemin de la Flambère · 31300 Toulouse · FRANCE · Tél. 33 (0)5 61 31 86 87  
Fax 33 (0)5 61 31 87 73 · commercial@majorcom.fr · www.majorcom.fr