

CH-420 / CH-430


Horn Speakers

FEATURES

- Excellent durability and clarity by adopting a synthetic resin structure
- Indoor and outdoor use with water repellent treatment
- Structure that can be easily attached to the wall by adjusting the orientation angle to 240° vertically and 135° to the left and right
- IP54



Frequency Response

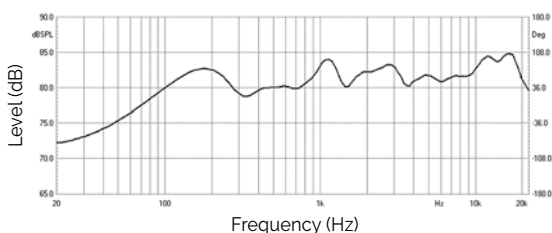

MODEL		CH-420	CH-430
Type		4" Horn Speaker	
Input Power 100 V		20/10W	30/15W
Impedance 100 V		500Ω/1kΩ	330/660Ω
Frequency Response (-10dB)		110 Hz ~ 12 kHz	110 Hz ~ 20 kHz
Frequency Range (-20%)		100 Hz ~ 18 kHz	90 Hz ~ 20 kHz
Sensitivity (1W/1m, 1kHz)		93 dB	94 dB
SPL max [Cont]		106 dB	109 dB
Nominal Dispersion (conical)	1kHz	110° x 180°	110° x 170°
	4kHz	50° x 30°	40° x 30°
Dimensions (LxHxD)		291 x 154 x 364mm	
Weight		3.4kg	3.5kg
Weather Resistance		IP54	