

# RM-S1000



## SIP mic station

RM-S1000 is a network remote microphone that allows you to paging with the IP speakers. It supports SIP, allowing two-way calls to other IP systems.

- Paging broadcast through the network
- Can be used with Inter-M IP speaker/IPA system
- Inter-M AOE-based network audio transceiver
- SIP (Session Initiation Protocol) support
- Support eco canceler for bidirectional calls
- Audio input/output volume control
- Monitor audio output through speakers and level meters
- Powered by POE or DC24V



Model		RM-S1000
MIC	Input sensitivity	MIC Vol. Max : -48dBV ± 3dB MIC Vol. Min : -10dBV ± 3dB
	Signal-to-noise Ratio (20kHzLPF, A-wt)	> 65dB
	THD (20kHzLPF)	< 0,1%
	Frequency Response 100Hz ~ 6kHz (Input : -48dBV, 1kHz)	0dB ± 3dB
AUX	Input sensitivity	-10dBV ± 3dB
	Signal-to-noise Ratio (20kHzLPF, A-wt)	> 75dB
	THD (20kHzLPF)	< 0,1%
	Frequency Response 100Hz ~ 18kHz (Input : -10dBV, 1kHz)	0dB ± 3dB
Network communication		100/1000 BASE-T(RJ-45)
Operating Temperature		-10°C ~ +40°C
Power Source		DC24V (not included) POE (IEEE 802.3af) : 44~57VDC
Power Consumption		Max 12W
Weight		1,3 kg
Dimensions (W x H x D)		200 x 73 x 206 mm

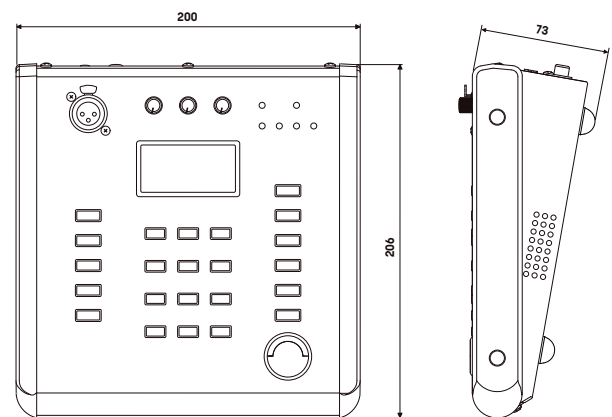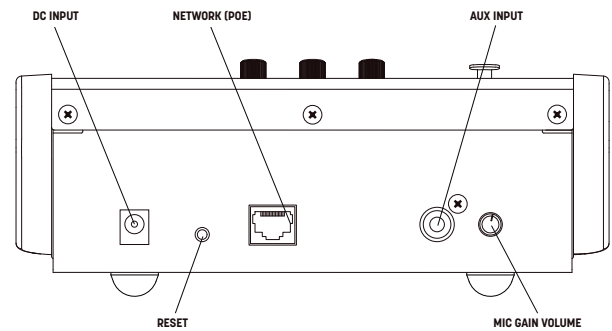

Specifications are subject to change without notice. 02/2024