

# IMPI 330T VA

## Design Sound Projector 20 W

Compliant with the international standards relative to public address and evacuation installations (EN54-24 Type B and ISO 7240-24), this sound projector is recommended for the equipment of all types of public places such as train stations, pedestrian streets, car parks etc.

### QUALITY SPEECH AND MUSIC REPRODUCTION

Equipped with a 12cm diameter loudspeaker, its frequency response makes it possible to broadcast high-quality music and information messages.

### EASY TO INSTALL

A solid aluminium bracket is provided to facilitate the installation and orientation of the projector in almost all positions. It is possible to mount the bracket first and then the sound projector.

### WITHSTANDS ALL KINDS OF WEATHER


Made of extruded aluminium, it can be installed indoors or outdoors (IP55) and blends in with most surroundings.

• **PEINT PROJECTEUR** : optional special paint (minimum 15 pcs - classic RAL)


Model	IMPI 330T VA
Body & grill	Aluminium
Nominal power	10W
Nominal Impedance	1kΩ
Power 100V Line	10 / 5 / 2.5W
Impedance	1 / 2 / 4kΩ
Bandwidth	120Hz - 20kHz
Sensitivity (1W/1m)	95dB
SPL MAX 1m	103dB
Directivity (H-V) @ 500Hz	360° - 360°
Directivity (H-V) @ 1kHz	240° - 260°
Directivity (H-V) @ 2kHz	115° - 115°
Directivity (H-V) @ 4kHz	54° - 54°
Speaker	5"
Cone	Plastic
Dimensions [mm]	Ø138 x (D)225
Weight	2.5kg
Operating temperature	-25 to +70°C
Protection Index	IP55
Color	White




EN 54 24

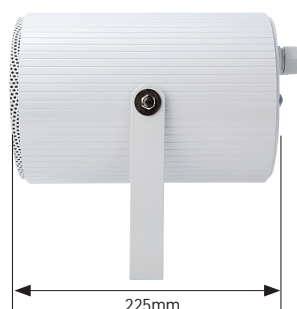


Horizontal directivity

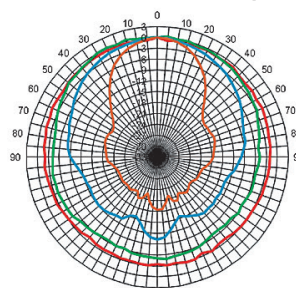

Vertical directivity



Bandwidth

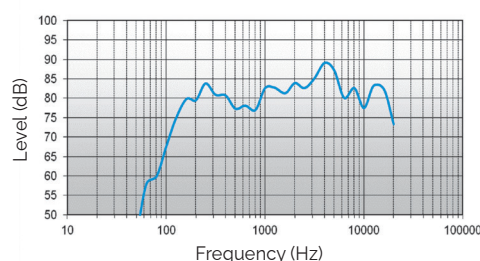

<p>n° ANPI 12</p> <p>Certificate n° : 1134-CPR-116</p> <p><b>MAJORCOM:</b></p> <p>56 chemin de la Flambeère 31300 TOULOUSE FRANCE</p>	<p><b>EN 54-24</b></p> <p>Speaker for voice alarm systems for systems for fire detection systems and fire alarm systems in buildings</p>
	<p><b>IMPI 330T VA</b></p> <p>Type B</p>