


# DPS-240D / DPS-360D / DPS-480D

## Class-D 2 x 240W / 2 x 360W / 2 x 480W - 100V - 24VDC digital amps

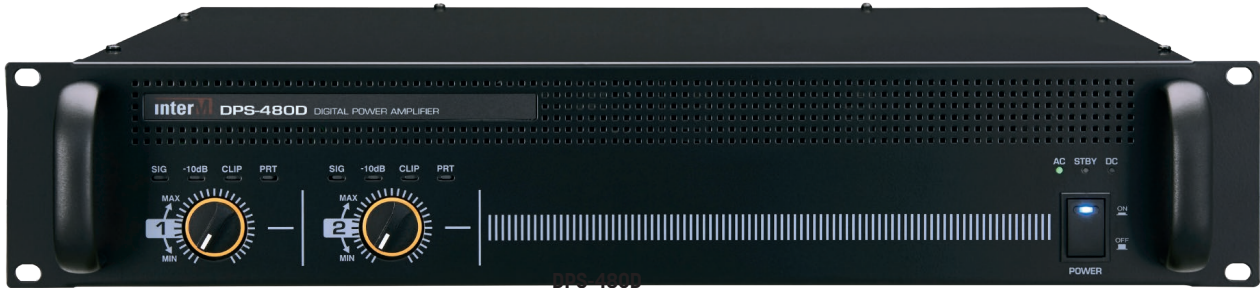

- This DPS Serie includes multiple Class-D, 2U digital amps with efficiency better than 90% for less heat dissipation, noise, and weight compared to traditional analog amps.
- The line features a number of single channel models ranging from 240 to 720W.
- These amps include 2 audio inputs, including one priority input to cut the current program so you can broadcast a priority message by dry contact, for example.
- Front-panel LEDs let you see amp status instantly.
- Fitted with a 24VDC supply terminal block for use on booster batteries.

| Model                  | DPS-240D                       | DPS-360D         | DPS-480D |
|------------------------|--------------------------------|------------------|----------|
| RMS Power              | 2 x 240W                       | 2 x 360W         | 2 x 480W |
| Bandwidth (1W, ±3dB)   | 60 to 20,000Hz                 |                  |          |
| 100V impedance         | 41,6Ω                          | 27,7Ω            | 20,8Ω    |
| 70V impedance          | 20,4Ω                          | 13,6Ω            | 10,2Ω    |
| Input sensitivity      | 1V/10kΩ                        |                  |          |
| THD (AES17, 1/8 Power) | < 0.5%                         |                  |          |
| Signal / Noise         | > 100dB                        |                  |          |
| Operating temperature  | -10°C ~ 40°C                   |                  |          |
| Power source           | 220 - 240VAC · 50/60Hz - 24VDC |                  |          |
| Consumption            | 130W                           | 250W             |          |
| Dimensions (WxHxD)     | 482 x 88 x 371mm               | 482 x 88 x 424mm |          |
| Weight                 | 7,4kg                          | 8,25kg           | 8,23kg   |



Rear panel