

CS-651WTBS

6W ABS Wall mounted Speaker

EN 54 24


Wall mounted speaker suitable for a wide range of applications

Recommended in particular for offices and small areas, this wall mount speaker can be used to display messages as well as play music, and blends in well with most types of decor. Excellent performance for the price.

COMPLIANT WITH EVACUATION STANDARDS


With its ceramic connection and thermal fuse, the CS-651WTBS complies with evacuation standards and provides an additional level of safety in case of emergency.

This wall mount speaker meets the international standards relative to public address and evacuation installations.

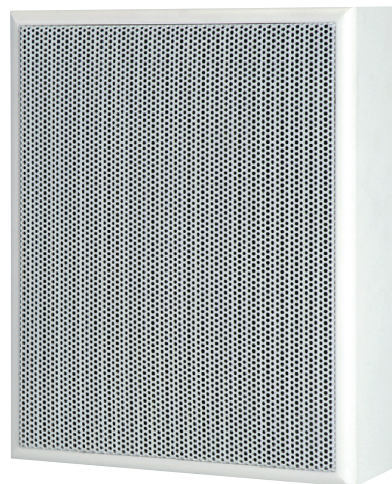


Model	CS-651WTBS
Body & grill	ABS fireproof - Steel
Nominal power	6W
Nominal Impedance	1.667Ω
Power 100V Line	6 / 3 / 15W
Impedance	1.667 / 3.333 / 6.667Ω
Bandwidth	150Hz - 20.000Hz
Sensitivity (1W/1m)	92dB
SPL MAX 1m	99dB
Directivity (H-V) @ 500Hz	180° - 180°
Directivity (H-V) @ 1kHz	120° - 150°
Directivity (H-V) @ 2kHz	150° - 180°
Directivity (H-V) @ 4kHz	40° - 70°
Speaker	6.5"
Cone	Paper composite
Dimensions (LxHxP)	204,5 x 254,5 x 87,5mm
Weight	1,6kg
Operating temperature	-10 to +55°C
Color	White


Bandwidth

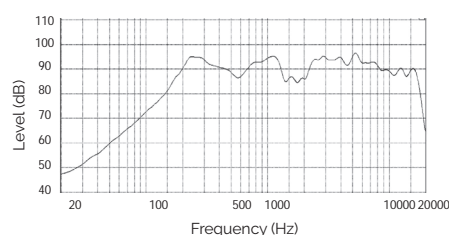


Horizontal directivity



Vertical directivity



00500 Hz
01000 Hz
02000 Hz
04000 Hz

 n° ITC Certificate n° : 1488-CPD-0322/W	EN 54-24 Speaker for voice alarm systems for systems for fire detection systems and fire alarm systems in buildings
MAJORCOM 56 chemin de la Flambe 31300 TOULOUSE FRANCE	CS-651WTBS Type A



www.majorcom.fr



commercial@majorcom.fr



+33 [0]5 61 31 86 87

MAJORCOM