

CSE-5206EN

6W Ceiling Speaker

EN 54 24





Quick-installation ceiling speaker

This ceiling speaker can be used to display messages and to play music. It has a ceramic terminal block and tool-free installation system, making it quick and easy to install. It is perfectly suited for most low-rise buildings with a false ceiling.

IMMEDIATE INSTALLATION


This ceiling speaker is quick and easy to install. Thanks to its patented installation system, it can be attached to the ceiling in a matter of seconds, thereby reducing set-up time.

CSE-5206EN is designed for use in EN 54-24 (Type A) P.A and Voice Alarm Systems.

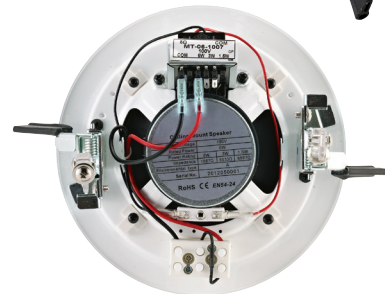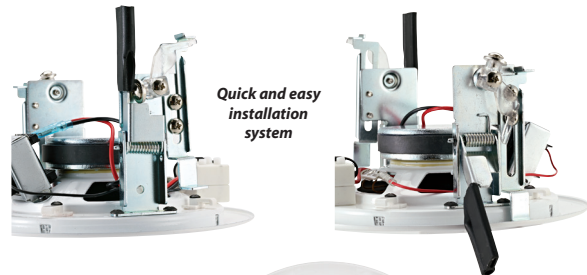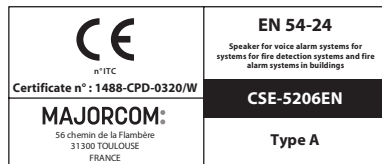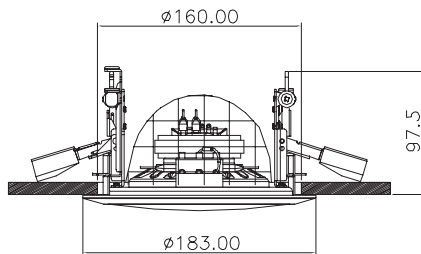

Model	CSE-5206EN
Body & grill	Metal
Nominal power	6W
Nominal Impedance	1667Ω
Power 100V Line	6 / 3 / 1,5W
Impedance	1,667 / 3,333 / 6,667Ω
Bandwidth	80Hz - 20,000Hz
Sensitivity (1W/1m)	92dB
SPL MAX 1m	99dB
Directivity (H-V) @ 500Hz	160°
Directivity (H-V) @ 1kHz	150°
Directivity (H-V) @ 2kHz	150°
Directivity (H-V) @ 4kHz	40°
Speaker	5"
Cone	Paper composite
Dimensions	Ø183 x (H)97,5mm
Ceiling Cut-out	168mm
Weight	1kg
Operating temperature	-10°C / +55°C
Protection Index	IP21

Bandwidth

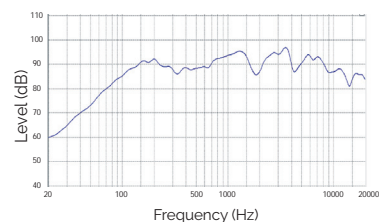

Directivity

