

CS-6HT60BS


2-way Horn Speaker - 60W

EN 54 24


- The CS-6HT60BS is equipped with a 2-way system, thereby providing a wide frequency range and high sensitivity, making it ideal for the high-quality reproduction of voice and music.
- With its controlled-directivity acoustical horn and two transducers, one for low frequencies and the other for high, this unique rectangular enclosure produces amazingly pure sound.
- The horn is waterproof and can be used in high-humidity environments. It is therefore suitable for outdoor use such as sports fields, stadiums, theme parks, exhibition halls and air terminals, as well as for applications used in P.A and evacuation systems.





Model	CS-6HT60BS
Body & grill	ABS fireproof
Nominal power	60W
Nominal Impedance	167Ω
Power 100V Line	60 / 30 / 15 / 7.5W
Impedance	167 / 333 / 666 / 1.333Ω
Bandwidth	100Hz - 20kHz
Sensitivity (1W/1m)	98dB
SPL MAX 1m	113dB
Directivity (H-V) @ 500Hz	100° - 140°
Directivity (H-V) @ 1kHz	40° - 70°
Directivity (H-V) @ 2kHz	80° - 90°
Directivity (H-V) @ 4kHz	80° - 150°
Speaker	6.5" + tweeter 2.5"
Dimensions [mm]	(L)332 x (P)391 x (H)418
Weight	7.05kg
Operating temperature	-25 to +70°C
Protection Index	IP66
Color	White

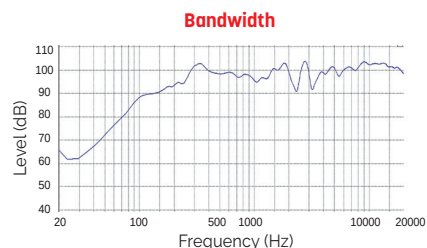

Horizontal directivity

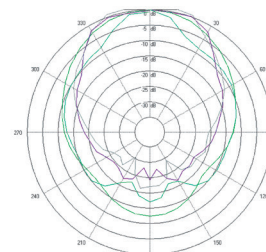

Vertical directivity

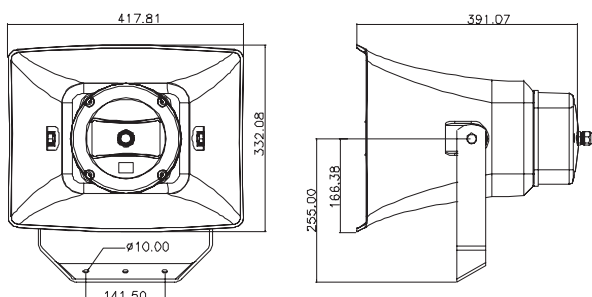

n°ITC Certificate n°: 1488-CPD-0315/W	EN 54-24 Speaker for voice alarm systems for systems for fire detection systems and fire alarm systems in buildings CS-6HT60BS Type B
MAJORCOM: 11, Avenue du Girou 31620 VILLENEUVE-LES-BOULOC FRANCE	

© MAJORCOM 03/2025