

DL-SE 20-200/T+ EN54

2-Way Ceiling Speaker




20 W

- The frameless design of this 2-way loudspeaker is inspired by the look of contemporary LED lights.
- The 20W powered speaker is equipped with a 200mm full-range loudspeaker and a 100V transformer with 3 power adjustments.
- The powder-coated metal housing in RAL 9016 guarantees long-term stability. For additional reliability, the speaker is impregnated against wetness.
- The speaker is also secured with protection class IP 21C against the security risks of environmental influences.
- Fast and easy installation through WAGO 221 connector and strong spring clamps with protective caps for vibration damping.
- The fire dome is included in the delivery.
- This speaker is suitable for a ceiling strength of approx. 1-45 mm.

Model	DL-SE 20-200/T+ EN54
Power (100V)	20 / 10 / 5 W
Impedance (100V)	500 / 1000 / 2000 Ω
Frequency Range	60 - 20.050 Hz
Frequency Response	47 - 22.000 Hz
SPL IEC268-5, 1W/1m	96,8 dB
SPL EN54-24, Pmax/4m	93,9 dB
Sensitivity EN54-24, 1W/4m	81,1 dB
Sensitivity EN54-24, 1W/1m	93,1 dB
Dispersion -6dB, 500Hz	180°
Dispersion -6dB, 1KHz	180°
Dispersion -6dB, 2KHz	77°
Dispersion -6dB, 4KHz	47°
Dimensions	265 X 115 mm
Ceiling Cut-out	$\varnothing$ 240 mm
Weight	1,6kg
Operating temperature	-10 to +55°C
Protection Index	IP21
Color	RAL 9016



EN 54 24

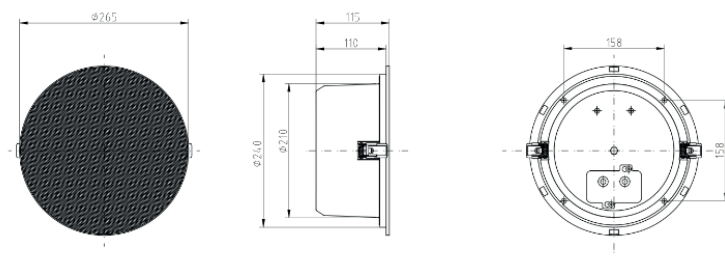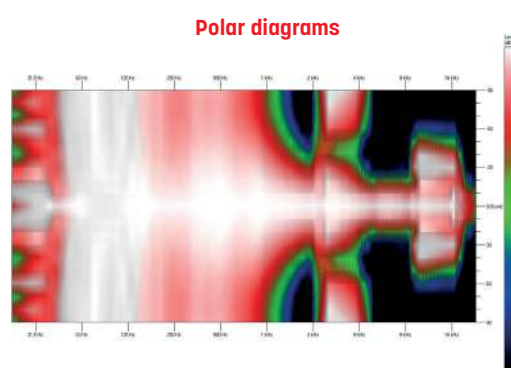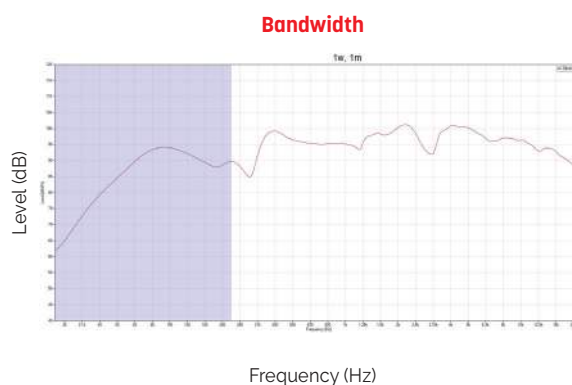

Certificate n° : 1438-CPR-0642 ic audio GmbH, Boehringerstraße 14a D-68307 Mannheim Germany	EN 54-24 Speaker for voice alarm systems for systems for fire detection systems and fire alarm systems in buildings.
	DL-SE 20-200/T+ EN54
	Type A