


IG-1900

Counter intercom

KEY POINTS

- Ideal counters & ticket offices
 - Console with embedded mic. & loudspeaker
 - Robust all-in-one client-side module
 - Quick and easy installation
- The counter intercom IG-1900 is ideal for closed counters or counters with glass/plexiglass protection.
 - It facilitates the transmission of messages between interlocutors and guarantees intelligible communication in total safety.
 - It also has intelligent audio functions such as active noise reduction and automatic sound level adjustment to ensure optimal exchange quality.
- It consists of a microphone console with integrated loudspeaker on the counter side (receptionist) and an all-in-one module with microphone and integrated

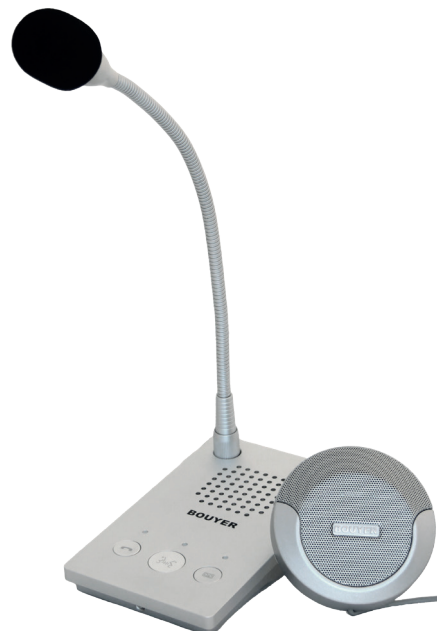

loudspeaker on the customer side.

- An AUX output also allows you to connect a magnetic induction loop, for example.

| Model | | IG-1900 |
|-----------------------------------|------------------------|--|
| Main console | Microphone type | Condensateur - Unidirectionnel |
| | Sensitivity | - 46 dB |
| | Frequency response | 20 Hz - 16 kHz |
| | Embedded speaker | 3 W (100Hz - 18kHz) |
| | Power supply | DC 12V 1.5A / Conso. ≤ 5W (Mains charger EU type C plug supplied) |
| | Temperature range | -10° / + 50°C |
| | Humidity range | ≤ 90% RH |
| | Color | Silver |
| | Material | Steel |
| | Dimensions (l x p x h) | 95 x 160 x 46.5mm |
| | Weight | 440 g |
| Secondary unit Client's module | Microphone type | Electret - Unidirectional |
| | Sensitivity | - 46 dB |
| | Frequency response | 20 Hz - 16 kHz |
| | Embedded speaker | 3W (92 dB @ 1W / 1m) 100 Hz - 18kHz |
| | Power supply | Powered by main console |
| | Temperature range | -10° / + 50°C |
| | Humidity range | ≤ 90% RH |
| | Color | Silver |
| | Material | Aluminium |
| | Dimensions (l x p x h) | 87 x 25 x 87mm |
| | Weight | 200 g |

IG-1900

Counter intercom



Detailed dimensions

