


# MIC FLEX-400 / MIC FLEX-450 / MIC FLEX-600P / MIC FLEX-610P

## Gooseneck-shaped microphones

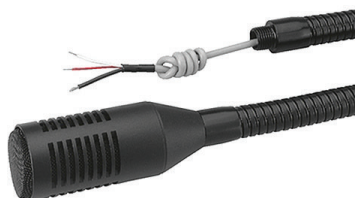

### MIC FLEX-400

- Dynamic gooseneck-shaped microphone
- Balanced model
- Cardioïd
- Threaded element M10 (8mm long)
- To be mounted at front panel or on microphone stand
- Total length 385mm



### MIC FLEX-450

- Gooseneck-shaped dynamic microphone
- Balanced switching
- Cardioïd
- XLR 3-poles connection
- Comes with microphone's wind-screen WS-40
- Total length 450 or 700mm



### MIC FLEX-600P

- Electret gooseneck-shaped microphone with red illuminated ring
- Cardioïd
- Windscreen
- XLR Plug 3 Poles
- Total length 445mm



### MIC FLEX-610P

- Electret gooseneck-shaped microphone with red illuminated ring
- Cardioïd
- Windscreen
- Threaded part: Ø 10mm x 40mm
- To be mounted at front panel or on microphone stand
- Total length 450mm

Feel free to get in touch with us for any other kind of MIC Flex (length, connexion, ...).

Model	MIC FLEX-400	MIC FLEX-450	MIC FLEX-600P	MIC FLEX-610P
Bandwidth	50 to 12,000Hz	80 to 16,000Hz	100 to 16,000Hz	100 to 16,000Hz
Sensitivity	-74dB ±3dB	1.4mV/Pa/1kHz	4mV/Pa/1kHz	4mV/Pa/1kHz
Impedance @ 1kHz	350Ω	500Ω	1,000Ω	1,000Ω
Connection	unplugged cable	XLR	XLR	unplugged cable
Dimensions	Ø 56 - L 168mm	Ø 30 - L 450mm	Ø 13/19 - L 445mm	Ø 13/19 - L 450mm
Weight	324g	222g	324g	190g