


# NAI-1104

## 4-channel audio converter with 4 dry contacts for the IP speaker system

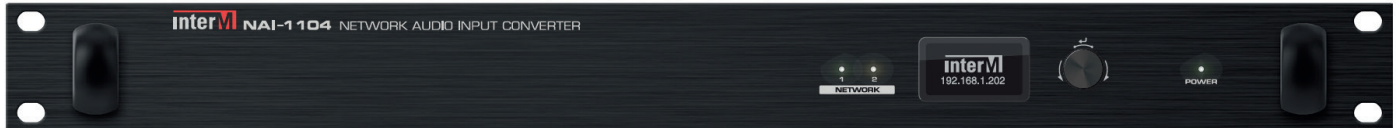

- The NAI-1104 allows up to 4 physical audio sources (CD player, radio tuner, etc.) to be added to the IP speaker system.
- 4-channel line-level balanced audio IP conversion for the IP speaker systems
- 4 Dry contact inputs (NO: normally open) inputs for scenario triggering and activation.
- AC/DC power supply.
- Proprietary audio and data transport protocol over network (AOE).

Model	NAI-1104
Audio input sensitivity	LINE : 0dBV, MIC : -60dBV
Nominal output	0dBV
Phantom power	+24V / 14mA
THD @ 1kHz input, 0dBV output	LINE : < 0.04%, MIC : < 0.2%
MIC : < 0.2% S/N at 1kHz, 0dBV output, A-WTD	LINE : > 70dB, MIC : > 65dB
Bandwidth	LINE : 20Hz-20kHz, MIC : 20Hz-20kHz
Network communication	100/1000 base-T (RJ-45)
Network cable length	MAX 100m
Dry contact	4-channel input
Operating temperature	-10 ~ +40
Power supply	AC 120-240V ~, 50/60Hz, 0.43A, DC +24V, 800mA
Power consumption	22W
Weight	3.1kg
Dimensions (WxHxD)	482x 44x 280mm

© MAJORCOM10/2023 - V2



Rear panel