

NPA Series

Network Power Amplifiers




NPA-240D

- Class-D amplifier with SMPS power
- Amplifier overheat, output short, overload, DC output, Earth Fault,
- Support for emergency broadcasting power (DC 24V)

- Provides various outputs and channels according to the installation environment
- Various contact input/output support
- Status LED / input signal level meter

Model	NPA-240S	NPA-240D	NPA-240Q	NPA-480S	NPA-480D
Rated power	240W x 1CH	240W x 2CH	240W x 4CH	480W x 1CH	480W x 2CH
Output voltage/impedance	100V/41.66Ω			100V/20.83Ω	
Input sensitivity	5 dBV				
THD(Rated Power, 1kHz)	Less than 1%				
S/N(20kHz LPF, A-wtd)	More than 85dB				
Frequency response (±3dB, 1W)	20~20kHz				
Network	Ethernet 100/1000 Base-T (RJ-45)				
Operating temperature	-10℃ ~ 40℃				
Power source	AC 220-240V, 50/60Hz, DC 24V				
Power consumption	135W	140W	280W	135W	240W
Weight	8.4kg	8.9kg	10kg	8.4kg	9.8kg
Dimensions	482(W) x 88(H) x 454(D)mm				

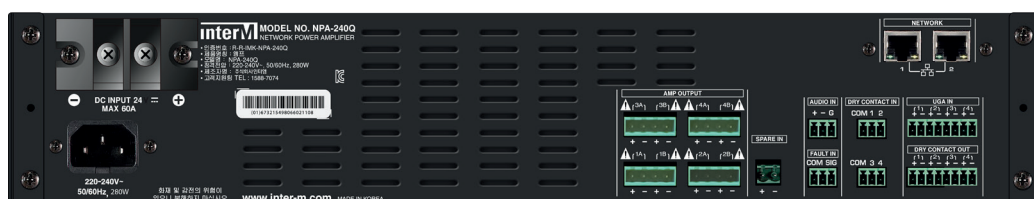

NPA-240Q rear panel