

P 630T VA

2-Way Ceiling Speaker

30 W


EN 54 24

- P 630T VA is a 2 way bass reflex ceiling speaker suitable for high quality installation.
- Fitted with a 6.5" speaker, a neodymium tweeter and a 100V transformer with 4 power taps, it offer a very high sound quality.
- Easy installation via screw mounting system.

Model	P 630T VA
Body & grill	ABS
Nominal power	30W
Nominal Impedance	333Ω
Power 100V Line	30 / 15 / 7.5 / 3.75W
Impedance	333 / 667 / 1.333 / 2.667Ω
Bandwidth	87 - 19 300Hz
Sensitivity (1W/1m)	89,8dB
SPL MAX 1m	110,2dB
Directivity (H-V) @ 500Hz	180°
Directivity (H-V) @ 1kHz	180°
Directivity (H-V) @ 2kHz	115°
Directivity (H-V) @ 4kHz	62°
Speaker	6.5"
Dimensions (mm)	Ø 239,5 x D 176,5
Ceiling Cut-out	Ø 210mm
Weight	2.27kg
Operating temperature	-10°C ~+55°C
Protection Index	IP21C
Color	RAL 9016




Bandwidth

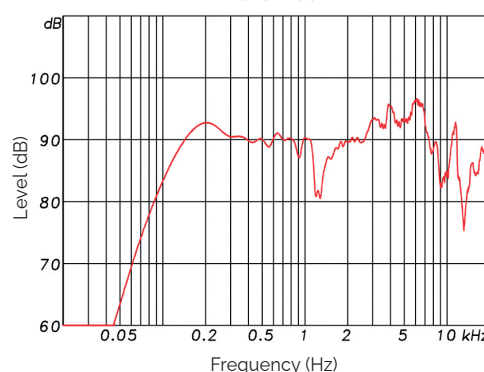

© MAJORCOM 03/2025

Polar diagrams

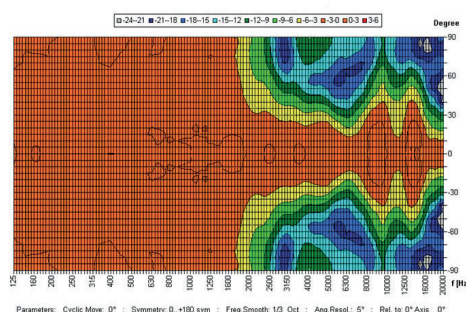

Parameters: Cyclic Move: 0° ; Symmetry: 0. +180 sym ; Freq Smooth: 1/3 Oct ; Ang Resol: 5° ; Rel. to 0° Axis: 0°

 n° 1438 Certificate n° : 1438-CPR-0856 MAJORCOM: 11, Avenue du Girou 31620 VILLENEUVE-LES-BOULOC FRANCE	EN 54-24 Speaker for voice alarm systems for systems for fire detection systems and fire alarm systems in buildings
	P 630T VA Type A

