


IMC 300T VA

2-way Omnidirectional speaker 30W

EN 54 24

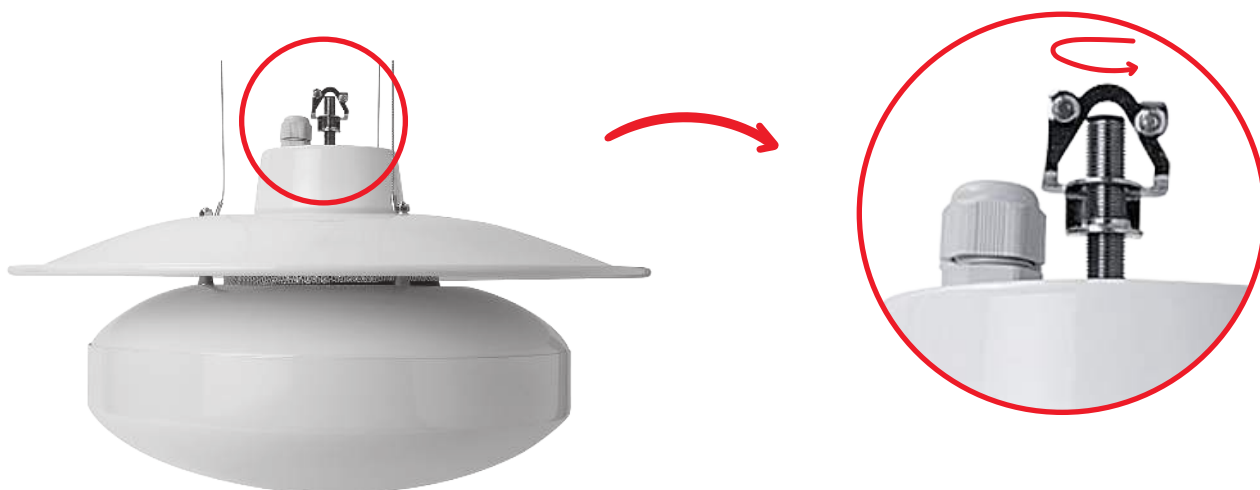


MOUNTING INSTRUCTIONS

1. Use the hook on the rope to hang the speaker on your support.
2. Unscrew the hook on top of the cover then unscrew the nut witch maintain the cover.
3. Insert cable(s) through the cable gland.
4. Screw cable(s) on the ceramic terminal between COM and needed power tapping.
5. Replace the cover, screw the nut, and screw the hook on the threaded shaft.
6. If needed, use the hook on the threaded shaft to hang the speaker and cut the safety ropes to avoid vibrating issue.



*Please note that the bowl at the top of the parabola is caused by tightening the nut.
It is necessary to tighten this nut over the entire length of the thread. As you can see, the blue brake must be screwed onto the threaded rod to prevent it from unscrewing.
If this were not the case, the bowl would cause vibrations that would be detrimental to the sound of the speaker, or worse still, the spherical part would not be well maintained and could fall.*

 n° 1134 20 Certificate n° : 1134-CPR-234 MAJORCOM 56 chemin de la Flambrère 31300 TOULOUSE FRANCE	EN 54-24 Speaker for voice alarm systems for systems for fire detection systems and fire alarm systems in buildings
	IMC 300T/VA Type A