

P 630T VA

2-Way Ceiling Speaker 30 W

FEATURES

- P 630T VA is a 2 way bass reflex ceiling speaker suitable for high quality installation.
- Fitted with a 6.5" speaker, a neodymium tweeter and a 100V transformer with 4 power taps, it offers a very high sound quality.
- Easy installation via screw mounting system.




EN 54 24


TECHNICAL CHARACTERISTICS

MODEL		P 630T VA							
Power	Dimensions (LxWxH)	Weight	Color	Sensitivity (1W/4W) EN 54-24	Frequency response (Hz)	Directivity 500 Hz	Directivity 1 kHz	Directivity 2 kHz	Directivity 4 kHz
30 / 15 / 7.5 / 3.75 W	239.5 x 141 mm	1.27 kg	RAL 9016	77,8 dB	87 > 19,3 K	180°	180°	180°	62°

MOUNTING INSTRUCTIONS

1. Open the terminal cover (metal plate) on the rear side of the speaker.
2. Put the connecting cable through the grommet of the metal plate.
3. Connect the wiring to the removeable 4-pole connector and tighten the cabling by the screws.
4. Plug the connector into the socket at the rear side of the speaker.
5. Fix the metal plate by turning the screws.
6. Remove the speaker grille by using the attached mounting hook.
7. Insert the speaker into the ceiling until the front baffle rim touches the ceiling. Turn the attachment screws to tighten the mounting tabs. Put the grille back on the speaker.

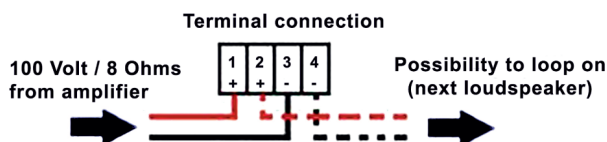

 n° 1438 22 Certificate n° : 1438-CPR-0856 MAJORCOM: 11, Avenue du Girou 31620 VILLENEUVE-LES-BOULOC FRANCE	EN 54-24 Speaker for voice alarm systems for systems for fire detection systems and fire alarm systems in buildings
	P 630T VA Type A