

BB 501 B/VA - BB 501W/VA

24W Wall Speakers

EN 54 24

Ideal for small and moderate volumes (reception halls, restaurants, pubs, conference rooms, shopping centres, swimming pools etc.), this white or black wall speaker guarantees very high-quality sound.

AESTHETICS

Equipped with a compact and robust ABS box, discrete and with an elegant finish, it blends in with all surroundings. Available in White (BB 501W VA) and Black (BB 501B VA).

EXCEPTIONAL AUDIO QUALITY

Equipped with a 12cm diameter loudspeaker and a tweeter, its Hi-Fi music quality will satisfy the most demanding listeners.

ADJUSTABLE MOUNTING BRACKET

The enclosures can be mounted horizontally to direct the loudspeaker upwards or downwards, or vertically to enable a left and right rotation using a U-shaped wall bracket made of steel (supplied).






BB 501 W/VA (White)



BB 501 B/VA (Black)



Model	BB 501 B/VA - BB 501 W/VA
Body & grill	ABS metal
Power nominal	24W
Impedance nominal	416Ω
Power 100V line	24 / 12 / 6W
Impedance	416 / 833 / 1,600Ω
Bandwidth	63 - 20,000Hz
Sensitivity (1W/1m)	85dB
SPL MAX 1m	98dB
Directivity (H-V) @ 500Hz	210° - 190°
Directivity (H-V) @ 1kHz	195° - 165°
Directivity (H-V) @ 2kHz	98° - 124°
Directivity (H-V) @ 4kHz	77° - 77°
Speaker	5" + tweeter
Cone	Plastic
Dimensions (mm)	200 x 261 x 155mm
Weight	2,5kg
Operating temperature	-15°C ~+55°C
Protection index	IP55
Color	BB 501 B/VA: Black / BB 501 W/VA: White

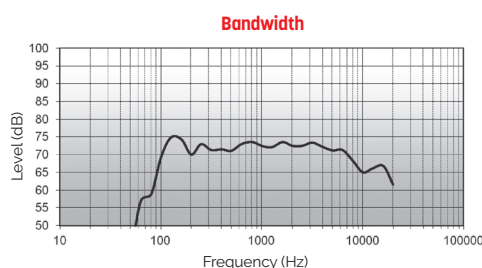

CE n° ANPI 22 Certificate n° : 1134-CPD-117 MAJORCOM: 56 chemin de la Flambeire 31300 TOULOUSE FRANCE	EN 54-24 Speaker for voice alarm systems for systems for fire detection systems and fire alarm systems in buildings BB 501B/VA BB 501W/VA Type A
---	--